



P2600

High-speed Cash Deposit Machine



Efficient Application



Affordable Expense



Reliable Quality
& Durability



Compact Design



Convenient & Secure
Transportation

P2600 is one compact machine for managing the retailing deposit process, including banknote validation, counting and storage to create the convenient and safe environments for customer satisfaction. The benefits of using P2600 become recognized and indispensable. The intelligent technology ensures to deliver an easy and safe banknote storage and transportation, whereas compact design requires little space to accommodate various functions.

P2600 High-speed Cash Deposit Machine

Compact Design with Minimal Footprint

Features

High-speed Deposit

- ◆ High banknotes processing speed (up to 720 pieces per minute) together with large infeed hopper capacity (200 notes) considerably reduce deposit time.
- ◆ Optimized transit path and algorithm ensure ultra-low jam rate

Storage Bag with Increased Capacity

- ◆ The contents are secured in the bag with an automatic closure
- ◆ The bag can hold up to 9,000 notes at one time*

Satisfactory Customer Experience

- ◆ The compact design can meet the requirement of retailers, petrol stations, etc. for the cost efficiency
- ◆ Experiences to handle various foreign currencies in a reliable and productive manner

Specifications

Controlling Unit

- ◆ Intel® Atom™ D2550 2.0 GHz, CPU 4G RAM
- ◆ 128G HDD
- ◆ Windows® 7
- ◆ Support: LAN, COM & USB

Banknote Processing Unit

- ◆ Bulk Note Deposit Module:
- ◆ Processing Speed: 720 notes/minute
- ◆ Entrance Capacity: 200 notes
- ◆ Support Envelope deposit: C6 162mm * 114mm
- ◆ Cash Reject Capacity: 100 notes
- ◆ Escrow Stacker: 200 notes
- ◆ Banknotes Storage Bag: up to 9,000 notes*

Customer Interfaces

- ◆ Display:
 - 5" LCD Touch Screen
 - Max Resolution: 800*480 pixels
 - Interface: LVDS
- ◆ Receipt Printer: 58mm graphical thermal printer
- ◆ Support Barcode (opt.)

Communication

- ◆ Standard TCP-IP connection

Security


- ◆ Physical:
 - Lock options: No lock, Mechanical lock, Electronic lock
 - Standard UL291 Level 1 safe, Reserved Position to Fix E-lock

Working Environment

- ◆ Temperature:
 - Indoor: 32°F (0 °C) to 104°F (40°C)
- ◆ Relative humidity: 20% to 95% non-condensing

Dimensions & Weight

- ◆ Height: 38.19 in. (1050mm) Width: 14.17 in. (350mm)
- ◆ Depth: 19.69 in. (411mm) Weight: approx. 176kg

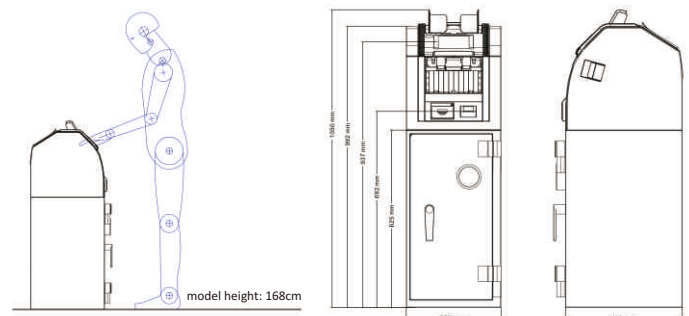

*The actual capacity is subject to the thickness and fitness of local currency.



GRGBanking Equipment Co., Ltd.

9,11 Kelin Road, Science City, High-tech Industrial Development Zone,
Guangzhou, China 510663
Tel: +86-20-6287 8545
Fax: +86-20-6287 9976
E-mail: atm@grgbanking.com

Specifications are subject to update without prior notice.
Please consult GRGBanking or its representative for the latest information.