



- For large posters, displays
- For menu cards, pop, placards
- For catalogues, documents
- For teaching materials, large printing

Let's LAMIPACK it!



Lamipacker®
LPE6510

Lamipacker®
LPE3510

Fujipla will change the existing way of business and education...

Get ready in one second :

Warm-up time is minimized

Simple and precise:

Foolproof mechanism that everyone can handle

Flexible and versatile:

Roll film lamination widens size adaptability



Hot LAMINATOR



LPE3510 A3 size
max.width
350mm

Hot LAMINATOR



LPE6510 A1 size
max.width
650mm

Standard Model for Beginners

Standard Model for Beginners

Hot LAMINATOR

LPE3510


max.width
350mm

A3
size

LPE6510

max.width
650mm

A1
size

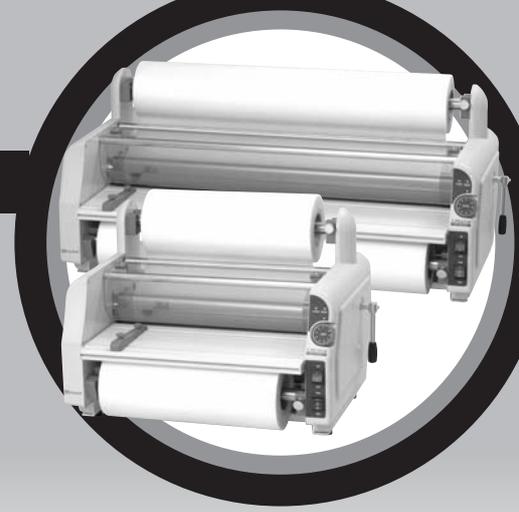

Fujipla will change the existing way
of business and education...

Features

- Warm-up time is much shorter than the conventional lamipackers.
- Light weight, compact size
- Easy setting: Dial setting is introduced for temperature setting. Film tension adjustment is also simple and easy.
- By using attachment, 1 inch and 2-1/4 inch core sizes are adaptable
- By using thinner film, you can save on running costs.

Specifications

Model	LPE3510	LPE6510
Max. laminating width	350mm(A3W)	650mm(A1)
Max. film thickness	125 mic.	
Laminating speed	1.3m/min.	0.84m/min.
Temperature range	90 - 140 °C	
Power consumption	800W	1400W
Power supply	AC 220-240V(50/60Hz)	
Dimensions	550(W)x390(D)x395(H)mm	850(W)x390(D)x395(H)mm
Weight	22.5kg	28.0kg
JAN(EAN)Code	4514015200356	4514015200363
Attachment	Film Setting Board	

*Specifications may be modified without prior notice.

Effects of lamination

- As a result of lamination, the efficiency of the durability and water resistance is improved and the laminated object is protected from scratches, stains and water.
- As lamination seals up the object completely, it prevents colors from fading.
- Laminated documents are completely falsification free.
- The printing gets more vivid as lamination process makes surface of the laminated object flat and smooth.

Laminating Film

- It is recommended to use our original roll film. Mismatching of film characteristics may lead to problems such as jamming or imperfect lamination.
- By choosing our lamination film, it is possible to obtain not only waterproof effect but also UV cut or anti-static effect.

Safety Precautions

- Please read instruction manual thoroughly before operation to avoid danger to yourself and failure in the lamination process.
- Should any of the following symptoms occur, unplug the Lamipacker and contact your Fujipla dealer.
 - The power cord or plug gets unusually hot.
 - A strange smell or smoke comes out of the machine.
 - Water or a foreign substance gets inside the machine.
- Warning and caution labels are omitted on the photos in this catalogue.
- Parts for maintenance service are available for a minimum of 5 years after cessation of the manufacture of product.

The description in the catalogue is the one as of March 2010.

Contact:

FUJIPLA Inc.

TOKYO, JAPAN

<http://www.fujipla-japan.com>